





**Extractor Tool
Instruction Sheet
Order No. 11-03-0016
(HTA2174)**

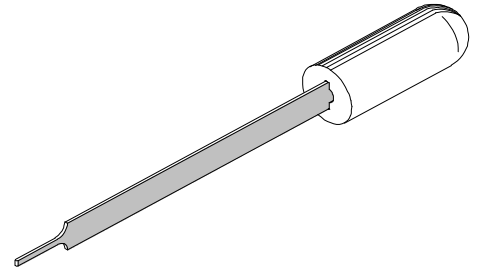

For removal of KK ®Double Cantilever Terminal Series in all housings.

OPERATION:

1. Insert the Extractor Tool into the slot on the bottom of the connector housing as shown (Figure 1).
2. Depress the terminal-locating tab, push the terminal back through the connector slot and pull the terminated wire out in the direction of the arrow as shown.
3. Molex does not offer repair parts for Extraction Tools due to the inexpensive nature of the tool.

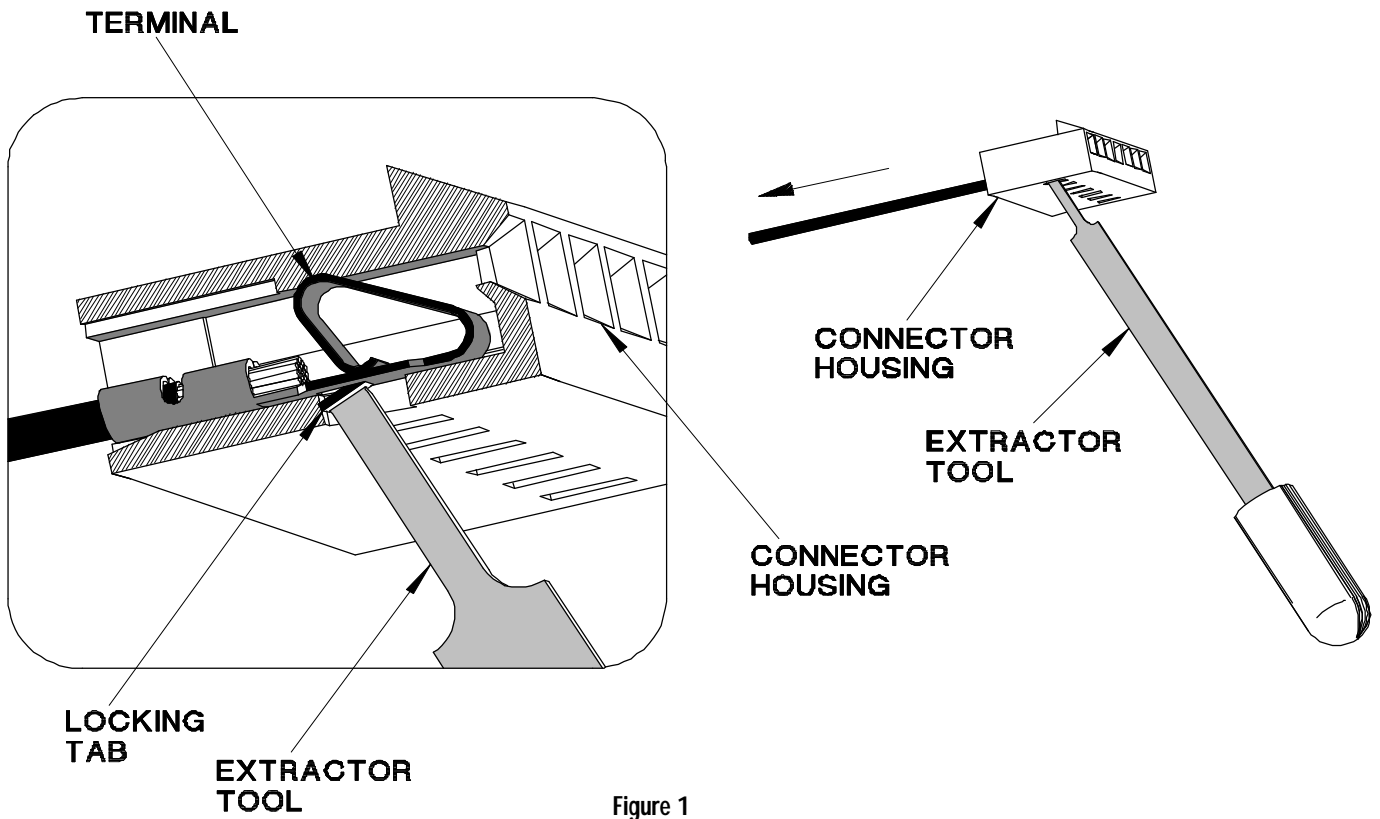

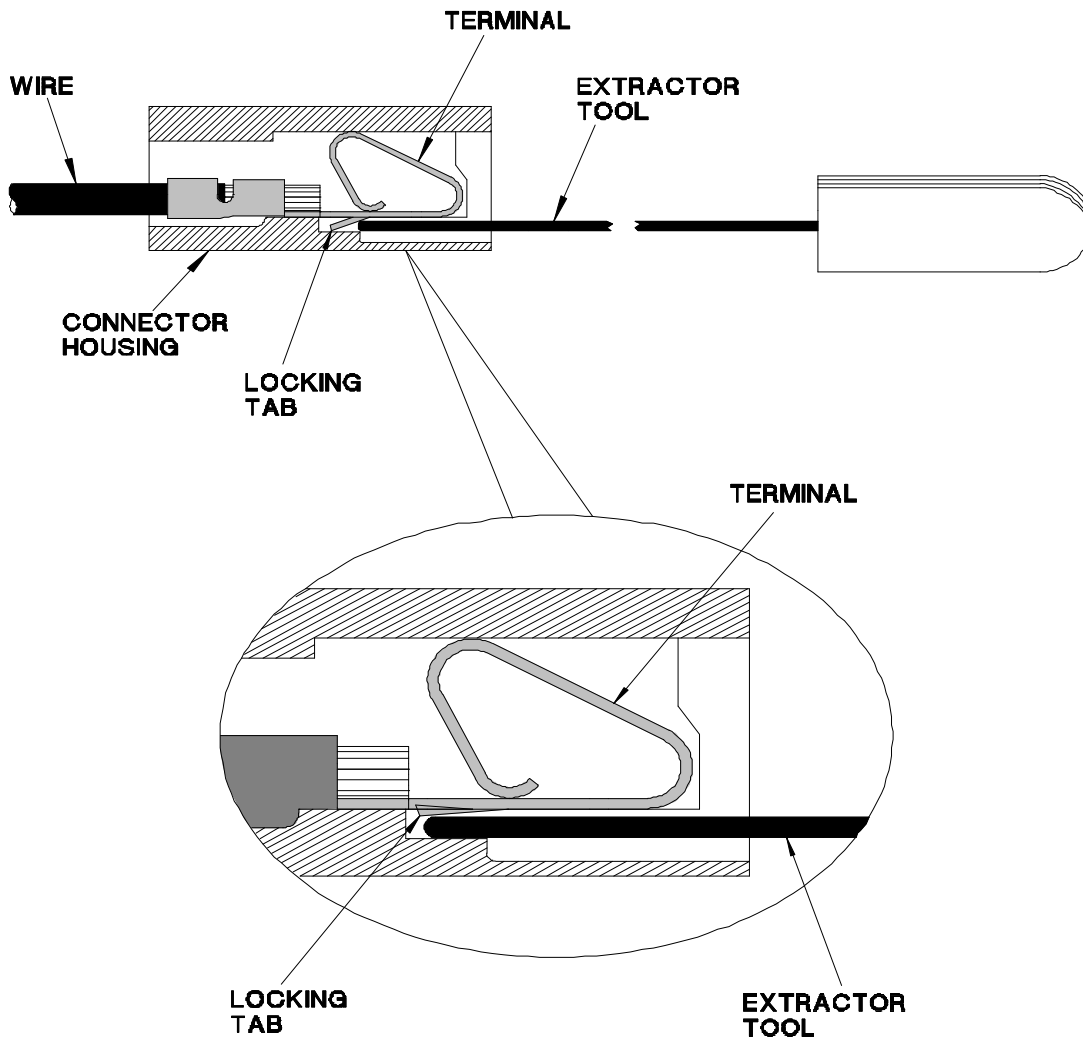


Figure 2

4. On housings without exposed locking tab windows, insert as shown (Figure 2) to depress locking tab and pull wire out.

Molex Application Tooling Group

1150 E. Diehl Road
Naperville, IL 60563
Tel: (630) 969-4550
Fax: (630) 505-0049